

MODEL/
STEAM OUTPUT
(kg/h)*

10

20

40

60

80

100

130

160

200

260

320

Heat output (kW)

8

16

32

48

67

80

107

120

160

200

240

Electrical power (kW)

8,7

16,7

32,7

48,7

67,7

80,7

107,7

120,7

160,7

200,7

240,7

Electrical connections**

1

2

The following services are incurred depending on the design.

Electrical power
control voltage
230 VAC (option
MX-CPA) (kW)

0,25

Electrical power
cooling unit (kW)

0,95

1,45

Electrical power
feed water heating
(kW)

9 / 18

9 / 18 / 27 / 36

Operating voltage

380-480 V · 50/60 Hz

*based on feed water temperature of 10 °C and 0,6 MPa (6 bar) steam overpressure

**A separate fuse is required for each connection. The connection cross-section is to be sized according to the electrical power and the on-site conditions (max. 120 mm²).





CERTUSS



ELECTRIC STEAM GENERATOR

THE PERFORMANCE CLASS

GENERATION E

[TECHNICAL DATASHEET]

www.certuss-emx.com

TECHNICAL DATA

MODEL/
STEAM OUTPUT
(kg/h)*

10

20

40

60

80

100


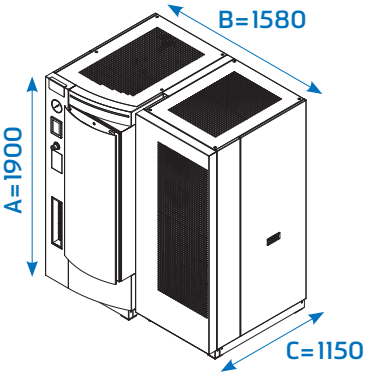
130

160

200

260

320

Heat output (kW)	8	16	32	48	67	80	107	120	160	200	240
Heating surface (m ²)	0,104	0,208	0,313	0,417	0,521	0,625	0,833	0,938	1,250	1,667	1,875
Water volume (l)	37 (NW = 16,0)			45 (NW = 24,2)					89 (NW = 45,8)		
Measures (mm)	Height (A) Width (B) Depth (C) 										
Empty weight (kg)	400			550					850		
Operating weight (kg)	520			630					960		
Design pressue	4 bar / 0,4 MPa										
	6 bar / 0,6 MPa										
	10 bar / 1,0 MPa										
	12 bar / 1,2 MPa										
	13 bar / 1,3 MPa										
	16 bar / 1,6 MPa										
Working pressure min. / max.	3,0 / 3,5 bar · 0,3 / 0,35 MPa										
	3,5 / 5,5 bar · 0,35 / 0,55 MPa										
	3,5 / 9,0 bar · 0,35 / 0,90 MPa										
	3,5 / 11,0 bar · 0,35 / 1,1 MPa										
	3,5 / 11,8 bar · 0,35 / 1,18 MPa										
	3,5 / 14,5 bar · 0,35 / 1,45 MPa										

MODEL/
STEAM OUTPUT
(kg/h)*

10

20

40

60

80

100

130

160

200

260

320

Steam outlet	1/2"		1"
Soft water connection	1/2"		
Safety valve	4-6 bar	1"	1 1/4"
	10-13 bar	1"	1"
	16 bar	1"	1 1/4"
Blow down / desalination line	1/2"		
Overflow / drainage feed water tank	1"		
Condensate return	1"		
Vapor vent line	1"		

VOLUME	
Volume feed water tank	45,5 ltr.

MATERIAL	
Pressure vessel	P235GH / Stainless steel (AISI 316 Ti)
Feed water tank	Stainless steel (AISI 316 Ti)
Armatures	Brass / Stainless steel (AISI 316L/AISI 316 Ti)
Housing	S235JR / Stainless steel (AISI 304)

CATEGORY		
In accordance to DGRL2014/68/EU	4 bar	II
	6-16 bar	III
In accordance to BetrSichV	4 bar	II
	6-10 bar	III
	12-16 bar	III